


WHAT IS CLAIMED IS:

1. A piezoelectric/electrostrictive film device comprising: a substrate which is formed of ceramic; and a piezoelectric/electrostrictive operation portion including a lower electrode, piezoelectric/electrostrictive layer, and upper electrode which are successively stacked on the substrate and including a projecting end of the piezoelectric/electrostrictive layer with which an upper surface of the lower electrode and a lower surface of the upper electrode are coated, wherein a projecting portion of the piezoelectric/electrostrictive layer is a coupling member constituted of a hybrid material in which inorganic particles are scattered in a matrix of a polymer compound, and is coupled to the substrate.

2. The piezoelectric/electrostrictive film device according to claim 1, wherein the coupling member is constituted of the hybrid material in which silica particles are scattered in the matrix containing a polysiloxane polymer as a main component.

3. The piezoelectric/electrostrictive film device according to claim 2, wherein the polysiloxane polymer is a polysiloxane polymer in which a substituent group is introduced in a part shown in the following general formula (1):

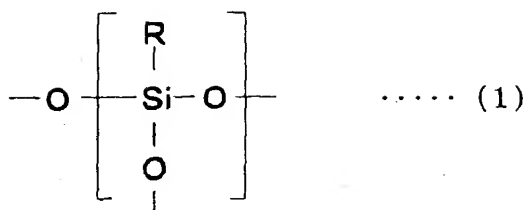

where R is at least one alkyl group selected from a group consisting of a methyl group, ethyl group, and propyl group, an aryl group, an alkenyl group, or at least one substituent alkyl group selected from a group consisting of a γ -methacryloxypropyl group, γ -glycidoxypropyl group, γ -chloropropyl group, γ -mercaptopropyl group, γ -aminopropyl group, and trifluoromethyl group.

4. The piezoelectric/electrostrictive film device according to claim 1, wherein an average particle diameter of the inorganic particles is in a range of 5 nm to 1 μm .


5. The piezoelectric/electrostrictive film device according to claim 4, wherein the inorganic particles have a two-peaks particle size distribution, and a ratio (D/C) of an average particle diameter (C) of large-diameter inorganic particles having a particle diameter larger than that corresponding to a inflection point existing between two peaks to an average particle diameter (D) of small-diameter inorganic particles having a particle diameter not more than that corresponding to the inflection point is in a range of 0.05 to 0.7.

6. A piezoelectric/electrostrictive film device

comprising: a substrate which is formed of ceramic; and a piezoelectric/electrostrictive operation portion including a plurality of electrodes and a plurality of piezoelectric/electrostrictive layers which are alternately stacked on the substrate and including a projecting end of each piezoelectric/electrostrictive layer with which upper and lower surfaces of each electrode are coated, wherein a projecting portion of the piezoelectric/electrostrictive layer is a coupling member constituted of a hybrid material in which inorganic particles are scattered in a matrix of a polymer compound, and is coupled to the substrate, and the electrodes are disposed in uppermost and lowermost layers in a multilayered structure of the piezoelectric/electrostrictive layers and electrodes.

7. The piezoelectric/electrostrictive film device according to claim 6, wherein the coupling member is constituted of the hybrid material in which silica particles are scattered in the matrix containing a polysiloxane polymer as a main component.

8. The piezoelectric/electrostrictive film device according to claim 7, wherein the polysiloxane polymer is a polysiloxane polymer in which a substituent group is introduced in a part shown in the following general formula (1):

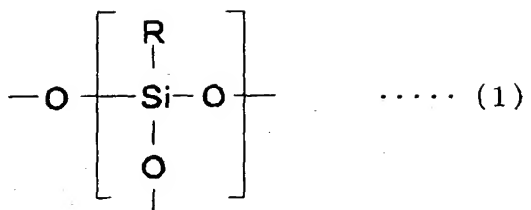

where R is at least one alkyl group selected from a group consisting of a methyl group, ethyl group, and propyl group, an aryl group, an alkenyl group, or at least one substituent
5 alkyl group selected from a group consisting of a γ -methacryloxypropyl group, γ -glycidoxypropyl group, γ -chloropropyl group, γ -mercaptopropyl group, γ -aminopropyl group, and trifluoromethyl group.

10 9. The piezoelectric/electrostrictive film device according to claim 6, wherein an average particle diameter of the inorganic particles is in a range of 5 nm to 1 μm .

15 10. The piezoelectric/electrostrictive film device according to claim 9, wherein the inorganic particles have a two-peaks particle size distribution, and a ratio (D/C) of an average particle diameter (C) of large-diameter inorganic particles having a particle diameter larger than that
20 corresponding to a inflection point existing between two peaks to an average particle diameter (D) of small-diameter inorganic particles having a particle diameter not more than that corresponding to the inflection point is in a range of 0.05 to 0.7.

25 11. A manufacturing method of a piezoelectric/


electrostrictive film device in which a
piezoelectric/electrostrictive operation portion including a
successively stacked lower electrode, piezoelectric/
electrostrictive layer, and upper electrode is disposed on a
5 substrate formed of ceramic, the method comprising:

coating an upper surface of the lower electrode, and
a lower surface of the upper electrode with the
piezoelectric/electrostrictive layer; projecting an end of
the piezoelectric/electrostrictive layer; applying a coating
10 liquid obtained by mixing a polymerizable oligomer and/or a
polymerizable monomer and inorganic particles in a dispersing
medium between at least the projecting portion of the
piezoelectric/electrostrictive layer, and the substrate;
drying the coating liquid to form a coupling member; and
15 coupling the projecting portion of the piezoelectric/
electrostrictive layer to the substrate by the coupling
member.

12. The manufacturing method of the piezoelectric/
20 electrostrictive film device according to claim 11, wherein
as the coating liquid, a liquid obtained by mixing a siloxane
oligomer and silica particles in a polar dispersing medium is
used.

25 13. The manufacturing method of the piezoelectric/
electrostrictive film device according to claim 12, wherein
the siloxane oligomer is a polymerizable monomer or

polymerizable oligomer shown in the following general formula
(2):



where R denotes at least one alkyl group selected from a
5 group consisting of a methyl group, ethyl group, and propyl
group, an aryl group, an alkenyl group, or at least one
substituent alkyl group selected from a group consisting of a
γ-methacryloxypropyl group, γ-glycidoxypopyl group, γ-
chloropropyl group, γ-mercaptopropyl group, γ-aminopropyl
10 group, and trifluoromethyl group, R' denotes at least one
alkyl group selected from the group consisting of the methyl
group, ethyl group, propyl group, and butyl group, the aryl
group, and the substituent alkyl group selected from a β-
methoxy ethoxy group and acetyl group, and n is an integer of
15 0 to 3.

14. The manufacturing method of the piezoelectric/
electrostrictive film device according to claim 11, wherein
the average particle diameter of the inorganic particles is
20 in a range of 5 nm to 1 μm.

15. The manufacturing method of the piezoelectric/
electrostrictive film device according to claim 14, wherein
the inorganic particles have a two-peaks particle size
25 distribution, and a ratio (D/C) of an average particle
diameter (C) of large-diameter inorganic particles having a
particle diameter larger than that corresponding to an

inflection point existing between two peaks to an average particle diameter (D) of small-diameter inorganic particles having the diameter not more than that corresponding to the inflection point is in a range of 0.05 to 0.7.

5

16. The manufacturing method of the piezoelectric/electrostrictive film device according to claim 11, wherein the applying of the coating liquid is performed by a spin coating method at a rotation speed of 1500 rpm or more.

10

17. A manufacturing method of a piezoelectric/electrostrictive film device in which a plurality of electrodes and a plurality of piezoelectric/electrostrictive layers are alternately stacked on a substrate formed of ceramic to dispose a piezoelectric/electrostrictive operation portion including a multilayered structure, the method comprising:

15


coating upper and lower surfaces of each electrode with each piezoelectric/electrostrictive layer; projecting an end of the piezoelectric/electrostrictive layer; applying a coating liquid obtained by mixing a polymerizable oligomer and inorganic particles in a dispersing medium between at least the projecting portion of the piezoelectric/electrostrictive layer, and the substrate; and drying the coating liquid to form a coupling member for coupling the projecting portion of the piezoelectric/electrostrictive layer to the substrate.

20

25

18. The manufacturing method of the piezoelectric/
electrostrictive film device according to claim 17, wherein
as the coating liquid, a liquid obtained by mixing the
siloxane oligomer and silica particles in a polar dispersing
5 medium is used.

19. The manufacturing method of the piezoelectric/
electrostrictive film device according to claim 18, wherein
the siloxane oligomer is a polymerizable oligomer shown in
10 the following general formula (2):



where R denotes at least one alkyl group selected from a
group consisting of a methyl group, ethyl group, and propyl
group, an aryl group, an alkenyl group, or at least one
15 substituent alkyl group selected from a group consisting of a
 γ -methacryloxypropyl group, γ -glycidoxypropyl group, γ -
chloropropyl group, γ -mercaptopropyl group, γ -aminopropyl
group, and trifluoromethyl group, R' denotes at least one
alkyl group selected from the group consisting of the methyl
20 group, ethyl group, propyl group, and butyl group, the aryl
group, and the substituent alkyl group selected from a β -
methoxy ethoxy group and acetyl group, and n is an integer of
0 to 3.

25 20. The manufacturing method of the piezoelectric/
electrostrictive film device according to claim 17, wherein
the average particle diameter of the inorganic particles is

in a range of 5 nm to 1 μ m.

21. The manufacturing method of the piezoelectric/
electrostrictive film device according to claim 10, wherein
5 the inorganic particles have a two-peaks particle size
distribution, and a ratio (D/C) of an average particle
diameter (C) of large-diameter inorganic particles having a
particle diameter larger than that corresponding to an
inflection point existing between two peaks to an average
10 particle diameter (D) of small-diameter inorganic particles
having the diameter not more than that corresponding to the
inflection point is in a range of 0.05 to 0.7.

22. The manufacturing method of the piezoelectric/
15 electrostrictive film device according to claim 17, wherein
the coating liquid is coated by a spin coating method at a
rotation speed of 1500 rpm or more.

23. The manufacturing method of the piezoelectric/
20 electrostrictive film device according to claim 17, further
comprising: disposing a plurality of electrodes in uppermost
and lowermost layers in a multilayered structure of the
piezoelectric/electrostrictive layers and electrodes.